

## DS-KB8112-IM

### IP Video Intercom Vandal-Resistant Door Station

#### Key Features

##### Basic Functions

- Video intercom function, supporting the communication with the master station, and the indoor station
- Access control function, supporting multiple door opening modes (indoor station, master station, client software, and web)
- Self-adaptive IR supplement with max. 5-meter IR distance
- High-performance embedded SOC processor
- IK 9 and IP 66

##### Video/Audio Functions

- HD video surveillance with WDR wide angle and high performance CMOS, up to 720P @ 30 fps
- Noise suppression and echo cancellation
- H.264 video compression standard
- Low illumination

##### Alarm Functions

- Supports the door magnetic alarm
- Auto-uploads alarm messages to the master station or the client software

##### Remote Controls

- Remote reboot, remote upgrade, time synchronization via NTP, and batch configuration function
- Supports Web remote access and OSD display
- Supports motion detection

##### Additional Features

- ISAPI (Internet Server Application Programming Interface) and ONVIF (Open Network Video Interface Forum) supported, to ensure greater compatibility and interoperability among different platforms
- Supports bit rate and frame rate configuration, P/N video standard configuration, Email configuration, and auto day & night switch
- Auto-uploads captured pictures to the FTP or the client software while unlocking the door



## Specifications


<b>Model</b>		<b>DS-KB8112-IM</b>
<b>System parameters</b>	<b>Processor</b>	High-Performance Embedded SOC Processor
	<b>Operation system</b>	Embedded Linux Operation System
<b>Camera parameters</b>	<b>Image sensor</b>	1/3" Progressive Scan CMOS, Color, Day/Night
	<b>Light sensitivity</b>	Low Illumination
	<b>Lens</b>	Pinhole, f3.47mm,F2.5
	<b>Field of view</b>	80° (Horizontal), 44° (Vertical)
	<b>Field of view adjustment</b>	-50° to 50°
<b>Video parameters</b>	<b>Video compression standard</b>	H.264
	<b>Video streaming</b>	Dual Stream
	<b>Resolution</b>	Main Stream: 1280 × 720 Sub-Stream: 640 x 480
	<b>Video frame rate</b>	PAL: 25 fps, NTSC: 30 fps
	<b>Video bit rate</b>	Main Stream: 32 Kbps to 4096 Kbps Sub-Stream: 32 Kbps to 2048 Kbps
	<b>Anti-flicker frequency</b>	50 Hz, 60 Hz
	<b>Wide dynamic range</b>	Digital WDR, Auto-Switch, DAY/ON, NIGHT/OFF
	<b>Image settings</b>	Color, Brightness, Contrast, Sharpness, Saturation, Video Standard, OSD Display
<b>Audio parameters</b>	<b>Audio streaming</b>	Two-Way, Full Duplex
	<b>Audio input</b>	Built-in Omnidirectional Microphone
	<b>Audio output</b>	Built-in Loudspeaker
	<b>Audio compression standard</b>	G.711 U
	<b>Audio compression rate</b>	64 Kbps
	<b>Audio quality</b>	Noise Suppression and Echo Cancellation
<b>Light supplement</b>	<b>Light supplement mode</b>	IR Supplement, IR Distance: 5 Meters
	<b>Wavelength</b>	940 nm
	<b>Control</b>	Auto ON/OFF, Time ON/OFF

Model	DS-KB8112-IM	
Network parameters	Ethernet	10/100 Mbps Self-Adaptive Ethernet
	Network protocol	RTSP, RTP, ONVIF, ISAPI, NTP, HTTP, HTTPS, DHCP, FTP, SMTP
	Network connection mode	DHCP, Static IP Address
	Door-unlocked duration	1 s to 255 s
Alarm parameters	Alarm input	Door Magnetic Alarm
Device interfaces	Network interface	1 RJ-45 10/100 Mbps Self-Adaptive Ethernet Interface
	I/O input	1
	I/O output	1 Relay Output
Event actions	Event	Motion Detection, Picture Capturing, Call Button Pressing
	File uploading	FTP
	Email notification	Login Succeeded via Software or Web
General	Material	Wall Mounting Shield: Zinc Alloy Front Panel: Zinc Alloy Rear Panel: Aluminum Alloy Wall Mounting Plate: Secc
	Impact protection	IK 9
	Ingress protection level	IP 66
	Power supply	PoE (Power over Ethernet)
		12 VDC
	Power consumption	Max. 12 W
	Working temperature	-30° C to +50° C (-22° F to 122° F)
	Working humidity	10% to 90%
	Video management software	Video management software from HIKVISION (included). For more information, see <a href="http://www.hikvision.com/us/Tools_84.html">http://www.hikvision.com/us/Tools_84.html</a>
	Dimensions (L × W × H)	161.9 mm × 74.1 mm × 53.2 mm (6.37" × 2.92" × 2.09")
Weight	773g (1.70lb)	


## Available Model

DS-KB8112-IM

## Typical Application

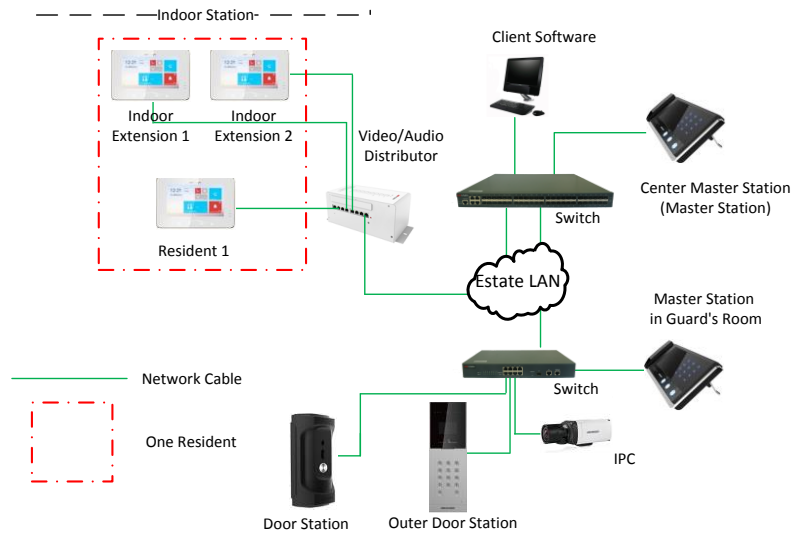

## Appearance and Interfaces

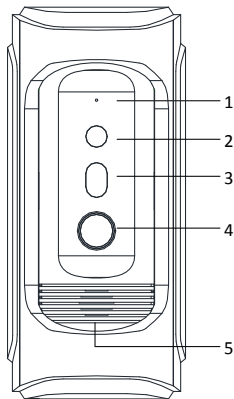

Index	Description
1	Microphone
2	Built-in Camera
3	IR Supplement Light
4	Call Button
5	Loudspeaker

Distributed by



## HIKVISION

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Africa**  
T +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision Europe**  
T +31-23-55-42-770  
info.eu@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision Korea**  
T +82-31-731-8841  
sales.korea@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**  
T +01628-902140  
support.uk@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com