


ELECTRO-MAGNETIC GATE LOCK

GL1200/GL1200R

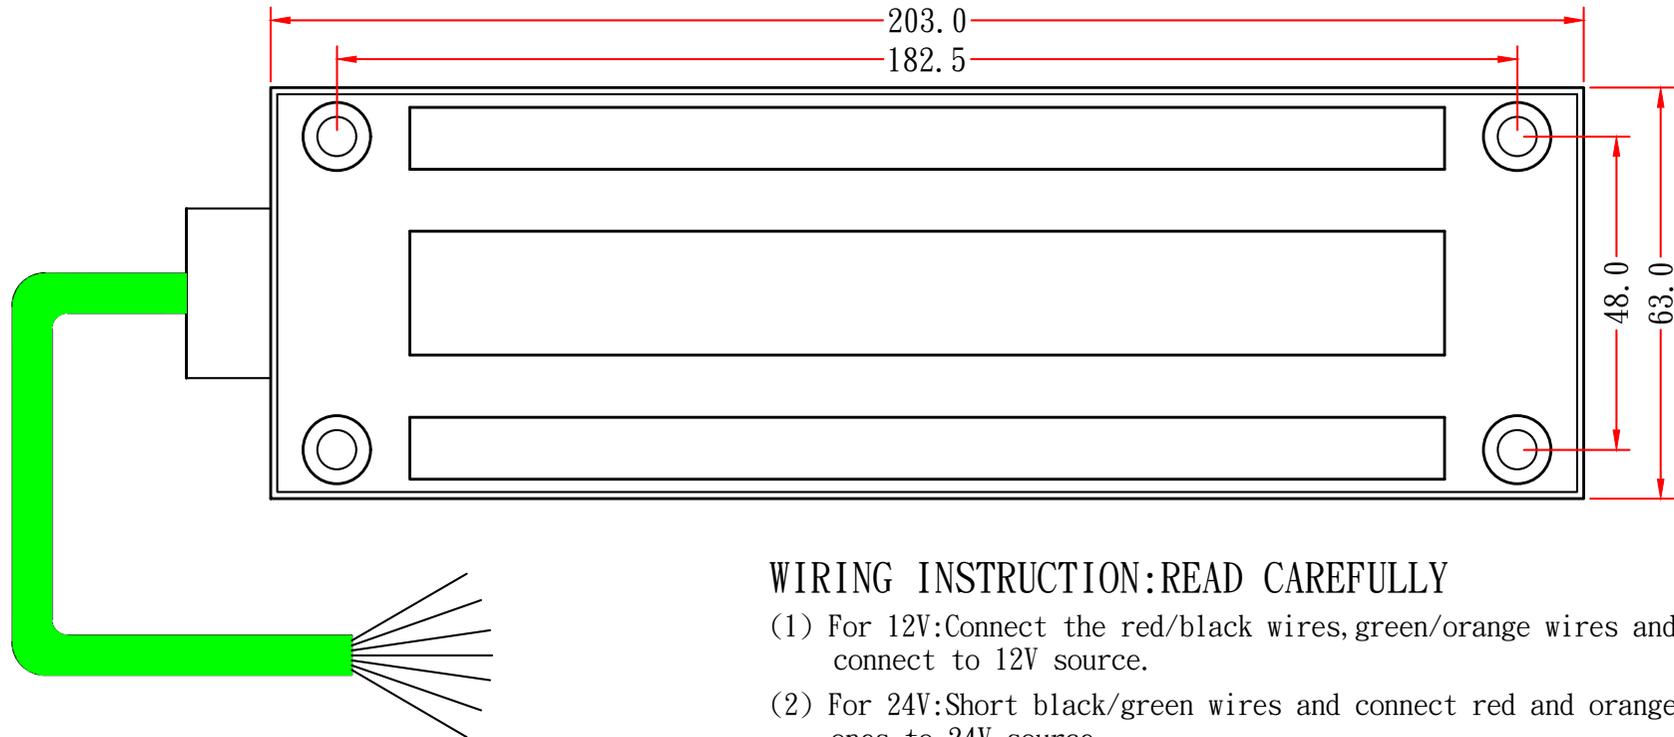

WIRING INSTRUCTION: READ CAREFULLY

- (1) For 12V: Connect the red/black wires, green/orange wires and connect to 12V source.
- (2) For 24V: Short black/green wires and connect red and orange ones to 24V source.
- (3) Lock status sensor: use with GL1200R ONLY.

☆NOTE :

- (1) Reed switch dry contacts are rated max 3W (max switching contact 0.25A) at 30VDC/AC for safe operation. Do not exceed this rating.
- (2) Varistor(TNR) should be placed as directed.
- (3). Before installing, add the threadlocker to all screws.
Firmly tighten the screws to avoid fastening loosen.

12V	24V	LOCK STATUS SENSOR(REED SW.)