



Super Dynamic HD Vandal Resistant Dome Network Camera WV-SW155 / WV-SW155MA

Super Dynamic Vandal Resistant Dome Network Camera WV-SW152 / WV-SW152M



HD / 1,280 x 960 H.264 Vandal Resistant Network Camera featuring Super Dynamic (WV-SW155)
SVGA / 800 x 600 H.264 Vandal Resistant Network Camera featuring Super Dynamic (WV-SW152)

Key Features

- 720p HD images up to 30 fps (WV-SW155)
- 1.3 Megapixel high sensitivity MOS image sensor
- Super high resolution at SVGA/800 x 600 created by 1.3 Megapixel high sensitivity MOS image sensor (WV-SW152)
- Multiple H.264 (High profile) streams and JPEG streams ensure simultaneous real time monitoring and high resolution recording by "UniPhier®", Panasonic's proprietary System LSI platform.
- Full frame (Up to 30 fps) transmission at 1,280 x 960 image size (WV-SW155)
- Full frame (Up to 30 fps) transmission at SVGA (800 x 600) image size (WV-SW152)
- **Super Dynamic** and ABS (Adaptive Black Stretch) technologies deliver 128x wider dynamic range compared to conventional cameras.
- **Face Super Dynamic** technology ensures clear face image.
- High sensitivity with Day & Night (Electrical) function:
 - 0.8 lx (Color), 0.6 lx (B/W) at F2.2 (WV-SW155)
 - 0.6 lx (Color), 0.4 lx (B/W) at F2.2 (WV-SW152)
- VIQS (Variable Image Quality on Specified area) technology allows the designated area to retain higher image quality while the excluded area will have a decreased image quality, which enables to use lower image file size and bit rate.
- Digital Noise Reduction: 3D-DNR ensures noise reduction in various conditions.
- Progressive scan ensures clear images with less motion blur and no tearing even when the subject is moving.
- Electronic sensitivity enhancement: Auto (Up to 16x) / OFF
- Selectable light control modes: Indoor scene (50 Hz) / Indoor scene (60 Hz) / ELC (maximum exposure time)
 - Indoor scene (50 Hz/60Hz): Flicker caused by fluorescent lightning will be automatically compensated.
 - ELC (maximum exposure time): The lightning control will be automatically performed by adjusting shutter speed in the range of ELC.
- 2x extra zoom at VGA resolution
- 2x, 4x digital zoom controlled by browser
- VMD (Video Motion Detection) with 4 programmable detection areas, 15 steps sensitivity level and 10 steps detection size
- Privacy Zone can mask up to 2 private areas, such as house windows and entrances/exits.
- Camera title display: Up to 20 alphanumeric characters on the browser
- Alarm sources including VMD and Panasonic alarm command can trigger actions such as FTP image transfer, E-mail notification, Indication on browser, and Panasonic alarm protocol output.

- JPEG Image compression ratio can be changed by alarm so that higher quality image can be provided.
- Prioritized stream control: One of the video streams can be prioritized when multiple recorders or client PCs are accessing the camera so that the recorder or the client PC can maintain the frame rate.
- SDHC/SD Memory card slot for manual recording (H.264 / JPEG), alarm recording (H.264 / JPEG) and backup upon network failure (JPEG)
- H.264 max. bit rate/client and Total bit rate control allows flexible network traffic management. Frame rate priority mode controls bit rate and compression ratio to provide the specified frame rate.
- Internet mode: H.264 images can be transmitted over HTTP protocol.
- Multi-language: English / Italian / French / German / Spanish / Portuguese / Russian / Chinese / Japanese
- IPv4/IPv6 protocol supported
- Supports SSL, DDNS (viewnetcam, RFC2136)
- Still images (JPEG) can be viewed on mobile phones via Internet.
- ONVIF compliant model
- Low profile design for discrete installation
- "Railway applications – Electronics equipment used on rolling stock" compatible with EN50155-T3, EN50121, ECE-R10*, EN45545*, EN50498*
* WV-SW155MA
- Wide coverage (Horizontal: 104 °, Vertical: 85 °)
- IP66 rated water and dust resistant. Compatible with IEC60529 measurement standard, Type 4X(UL50), NEMA 4X compliant.
- Vandal resistant mechanism for high reliability

Standard Accessories

• Installation Guide1 pc.	The followings are for installation.
• Important Safety Instructions1 pc.	• Fixing Screws (M4 x 8 mm)3 pcs.
• CD-ROM*11 pc.	• Installation Template Label1 pc.
• Code Label*21 pc.	• Plastic cover1 pc.
• Lens adjuster1 pc.	• Mount Bracket1 pc.
*1 The CD-ROM contains the operating instructions and different kinds of tool software programs.	• Tamperproof Screw Bit1 pc.
*2 This label may be required for network management.	• Waterproof Tape1 pc.
The network administrator shall retain the code label.	

Optional Accessory



Specifications

TV System		NTSC	PAL		
Camera	Image Sensor	1/3 type MOS image sensor			
	Effective Pixels	Approx. 1.3 mega pixels			
	Scanning Mode	Progressive			
	Scanning Area	4.8 mm (H) x 3.6 mm (V) (3/16" (H) x 5/32" (V))			
	Minimum Illumination	WV-SW155	Color: 0.8 lx (F2.2, Auto slow shutter: Off (1/30s), Gain: On (High)) 0.05 lx (F2.2, Auto slow shutter: Max. 16/30s, Gain: On (High)) *1 BW: 0.6 lx (F2.2, Auto slow shutter: Off (1/30s), Gain: On (High)) 0.04 lx (F2.2, Auto slow shutter: Max. 16/30s, Gain: On (High)) *1		
		WV-SW152	Color: 0.6 lx (F2.2, Auto slow shutter: Off (1/30s), Gain: On (High)) 0.04 lx (F2.2, Auto slow shutter: Max. 16/30s, Gain: On (High)) *1 BW: 0.4 lx (F2.2, Auto slow shutter: Off (1/30s), Gain: On (High)) 0.03 lx (F2.2, Auto slow shutter: Max. 16/30s, Gain: On (High)) *1		
	White Balance	AWC (2,000 - 10,000 K), ATW1 (2,700 - 6,000 K), ATW2 (2,000 - 6,000 K)			
	Light Control Mode	Indoor scene (50 Hz / 60 Hz) / ELC			
	Shutter Speed	With Super Dynamic On	ELC (1/30 s)		
		With Super Dynamic Off	ELC (1/30 s), ELC (3/100 s), ELC (3/120 s), ELC (2/100 s), ELC (2/120 s), ELC (1/100 s), ELC (1/120 s), ELC (1/250 s), ELC (1/500 s), ELC (1/1,000 s), ELC (1/2,000 s), ELC (1/4,000 s), ELC (1/10,000 s)		
	Super Dynamic	On / Off			
	Face Super Dynamic	On / Off (Only when Super Dynamic: On)			
	Adaptive Black Stretch	On / Off			
	AGC	On (High) / On (Mid) / On (Low) / Off			
	Electronic Sensitivity UP Day & Night (Electrical)	Off (1/30 s), Max. 2/30 s, Max. 4/30 s, Max. 6/30 s, Max. 10/30 s, Max. 16/30 s			
	Dynamic Range	52 dB typ. (Super Dynamic: On, Light Control: ELC)			
	Digital Noise Reduction	High / Low			
	Video Motion Detection	On / Off, 4 areas available			
	Privacy Zone	On / Off (up to 2 zones available)			
	VIQS	On / Off			
Camera Title (OSD)	Up to 20 characters (alphanumeric characters, marks), On / Off				
Focus Adjustment	MANUAL				
Lens	Focal Length	1.95 mm			
	Zoom Ratio	1x / Extra zoom: 2x (at VGA resolution)			
	Angular Field of View	Horizontal: 104°, Vertical: 85°			
	Maximum Aperture Ratio	1 : 2.2			
	Focusing Range	0.5 m - ∞			
Adjusting Angle		Ceiling Installation Horizontal: -20° to +20°, Vertical: -20° to +90° Wall Installation Horizontal : -80° to +80°, Vertical: -90° to +20°			
Browser GUI	Camera Control	Brightness			
	Display Mode	Spot, Quad: Image from 16 cameras can be displayed in 4 different Quad screens or 16 split screen (JPEG only). 20 characters camera title available.			
	Digital Zoom	1x, 2x, 4x controlled by browser GUI			
	Camera Title	Up to 20 alphanumeric characters			
	Clock Display	Time: 12H/24H, Date: 5 formats on the browser, Summer time (Manual)			
	One Shot Capture	A still picture will be displayed on a newly opened window.			
	SD Memory Data Download	Still or motion Images recorded in the SDHC/SD memory card can be downloaded.			
	GUI/Setup Menu Language	English, Italian, French, German, Spanish, Portuguese, Chinese, Russian, Japanese			
	System Log	Up to 100 (Internal), Up to 4,000 (SDHC/SD memory when the recording format is set to JPEG), error logs			
	Supported OS *2 *3	Microsoft® Windows® 8.1, Microsoft® Windows® 8, Microsoft® Windows® 7, Microsoft® Windows Vista®, Microsoft® Windows® XP SP3			
Supported Browser	Windows® Internet Explorer® 11 (32 bit), Windows® Internet Explorer® 10 (32 bit), Windows® Internet Explorer® 9 (32 bit), Windows® Internet Explorer® 8 (32 bit), Windows® Internet Explorer® 7 (32 bit), Microsoft® Internet Explorer® 6 SP3				
Network	Network IF	WV-SW155 / WV-SW152	10Base-T / 100Base-TX, RJ45 connector (female)		
		WV-SW155MA	10Base-T / 100Base-TX, M12 connector (female)		
		WV-SW152M	10Base-T / 100Base-TX, M12 connector (male)		
	Image Resolution	Aspect ratio [4 : 3]	WV-SW155	H.264: 1,280 x 960 / VGA (640 x 480) / QVGA (320 x 240), up to 30 fps JPEG: 1,280 x 960 / 640 x 480 / 320 x 240, up to 30 fps	
			WV-SW152	H.264: 800 x 600 / VGA (640 x 480) / QVGA (320 x 240), up to 30 fps JPEG: 800 x 600 / VGA (640 x 480) / QVGA (320 x 240), up to 30 fps	
		Aspect ratio [16 : 9]	WV-SW155	H.264: 1,280 x 720 / 640 x 360 / 320 x 180, up to 30 fps JPEG: 1,280 x 720 / 640 x 360 / 320 x 180, up to 30 fps	
			WV-SW152	H.264: 640 x 360 / 320 x 180, up to 30 fps JPEG: 640 x 360 / 320 x 180, up to 30 fps	
		H.264/MPEG-4 *4	Transmission Mode	Constant bitrate / Framerate priority / Best effort / Advanced VBR	
			Frame Rate	1 / 3 / 5 / 7.5 / 10 / 15 / 20 / 30 fps 1 / 3 / 5 / 7.5 / 10 / 12 / 15 / 20 / 30 fps	
	JPEG	Bit Rate/Client	64 / 128 / 256 / 384 / 512 / 768 / 1,024 / 1,536 / 2,048 / 3,072 4,096 / 8,192* kbps * H.264 mode only (WV-SW155)		
Image Quality		Low / Normal / Fine			
Transmission Type		Unicast / Multicast			
Total Bit Rate	Image Quality	10 steps			
	Refresh Interval	0.1 fps - 30 fps			
	Transmission Type	Pull / Push			
Supported Protocol	IPv6: TCP/IP, UDP/IP, HTTP, HTTPS, FTP, SMTP, DNS, NTP, SNMP, DHCPv6, RTP IPv4: TCP/IP, UDP/IP, HTTP, HTTPS, RTSP, RTP, RTP/RTCP, FTP, SMTP, DHCP, DNS, DDNS, NTP, SNMP, UPnP				

TV System		NTSC	PAL
Network	FTP Client	Alarm image transmission, FTP periodic transmission (When the FTP transmission is failed, backup on an optional SDHC/SD memory card is available.)	
	No. of Simultaneous Users	Up to 14 users (Depends on network conditions)	
	SDHC/SD Memory Card (Option)	Manufactured by Panasonic SDHC memory card: 4 GB, 8 GB, 16 GB, 32 GB SD memory card : 256 MB, 512 MB, 1 GB, 2 GB except miniSD card and microSD card	
	Cellular Phone Compatibility	JPEG image	
Alarm	Mobile Terminal Compatibility	iPad, iPhone, iPod touch (iOS 4.2.1 or later), Android™ mobile terminals	
	Alarm Source	VMD, Command alarm	
	Alarm Actions	SDHC/SD memory recording, E-mail notification, Indication on browser, FTP image transfer, Panasonic protocol output	
General	Alarm Log	With SDHC/SD memory card: 5,000 logs, Without SDHC/SD memory card: 1,000 logs	
	Schedule	VMD	
General	Safety/EMC Standard	UL (UL60950-1), FCC (Part15 ClassA), C-UL (CAN/CSA C22.2 No.60950-1), DOC (ICES003 ClassA)	CE, IEC60950-1 (EN55022 ClassB, EN55024)
	Power Source and Power Consumption	PoE (IEEE802.3af compliant) / PoE 48 V: 56 mA (Class 1 device)	
	Ambient Operating Temperature	-30 °C to +50 °C (-22 °F to 122 °F)	
	Ambient Operating Humidity	Less than 90 % (no condensation)	
	Impact Protection	IEC 60068-2-75 test Eh, 50 J / IEC 62262 IK10	
	Water and Dust Resistance	IP66, IEC60529 measuring standard compatible, Type 4X(UL50), NEMA 4X compliant ⁵	
	Railway Application	EN50155-T3, EN50121, ECE-R10*, EN45545*, EN50498* * WV-SW155MA	
	Dimensions	ø109 mm x 47 mm (H) (ø4-9/32" x 1-27/32" (H)) With Mount Bracket: ø109 mm x 70 mm (H) (ø4-9/32" x 2-3/4" (H))	
	Mass (approx.)	350 g (0.77 lbs.) With Mount Bracket: 410 g (0.9 lbs)	
	Finish	Main body: Aluminum die cast, light gray Dome section: Clear polycarbonate resin	


*1 Converted value

*2 Refer to "Notes on Windows Vista® / Windows® 7 / Windows® 8 / Windows® 8.1" on the provided CD-ROM for further information about system requirements for a PC and precautions when using Microsoft® Windows® 8.1 or Microsoft® Windows® 8 or Microsoft® Windows® 7 or Microsoft® Windows Vista®.


*3 When using IPv6 for communication, use Microsoft® Windows® 8.1 or Microsoft® Windows® 8 or Microsoft® Windows® 7 or Microsoft® Windows Vista®.

*4 Transmission for 2 streams can be individually set in the same compression method.
*5 Only when installation work specified in this book is properly performed and appropriate waterproof treatment is performed.

Part Names and Functions

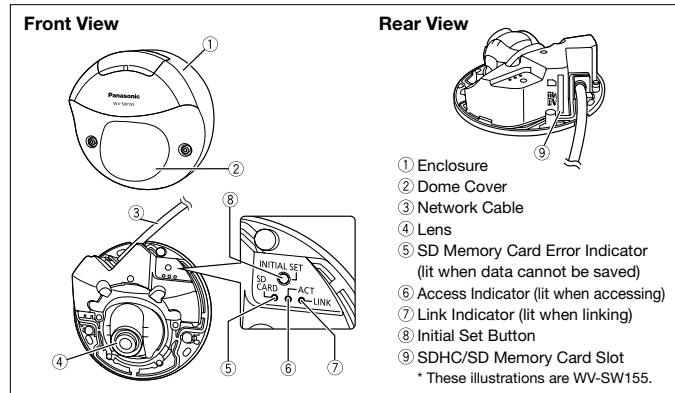

Appearance

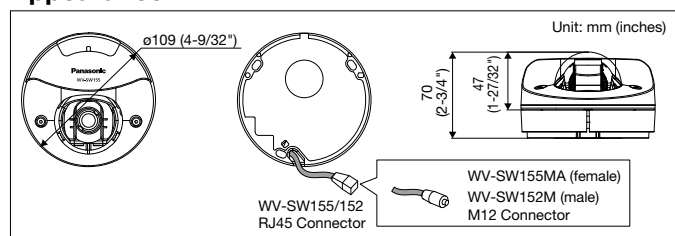

Trademarks and registered trademarks

- Microsoft, and Windows are registered trademarks of Microsoft Corporation in the U.S. and other countries.
- iPad, iPhone and iPod touch are registered trademarks of Apple Inc.
- Android is a trademark of Google Inc.
- ONVIF and the ONVIF logo are trademarks of ONVIF Inc.
- "MEGA Super Dynamic", "Super Dynamic", and "i-PRO SmartHD" logos are trademarks or registered trademarks of Panasonic Corporation.

Important

- Safety Precaution: Carefully read the operating instructions and installation manual before using this product.
- Panasonic cannot be responsible for the performance of the network and/or other manufacturers' products used on the network.

- Masses and dimensions are approximate. • Specifications are subject to change without notice.

DISTRIBUTED BY:

Panasonic

<http://security.panasonic.com>

<http://www.facebook.com/PanasonicNetworkCamera>

(2A-079EL)