

HRX-1621

16 Channel Pentabrid DVR



Key Features

- 5-in-1 16CH Pentabrid DVR
- AHD/HDTVI/HDCVI/CVBS/IP inputs
- Maximum 16 channel Analog + 2 channel Network (Maximum 18CH), up to 8MP resolution
- Migrate analog channels to IP channels
- H.265, H.264, MJPEG
- 8fps@8MP, 12fps@5MP, 30fps@2MP recording
- Coaxial control
- Smart search(only Network camera)
- Up to 8 SATA HDDs(6TB/HDD)
- HDMI/VGA Dual monitor
- P2P service(QR code connect)

Display

Analog Camera	Inputs	16CH(1Vp-p 75ohm, BNC)
	Signal Type	AHD(8MP, 5MP, 4MP, 1080p, 720p) HDTVI(8MP, 5MP, 4MP, 1080p, 720p) HDCVI(5MP, 4MP, 1080p, 720p) CVBS
Network Camera	Inputs	Maximum 18CH
	Resolution	8MP ~ CIF
	Protocols	SUNAPI(Wisenet), ONVIF
Live	Local Display	1x HDMI, 1x VGA (Dual monitor) HDMI: 3840 x 2160, 1920x1080, 1280x720 (1920x1080, Clone mode) VGA: 1920x1080, 1280x720
	Resolution	[Analog Camera] - 8MP(15fps), 5MP(20fps), 4MP(30fps), 2MP(30fps),1MP(30fps), 960H/720H(30fps) *per CH [Network Camera] - Typical 2MP(480fps)

Performance

Record	Compression	H.265, H.264, MJPEG
	Record Rate(Analog)	Analog Camera (Main Stream) 8MP 8fps/CH, 5MP 12fps/CH, 4MP 15fps/CH, 2MP 30fps/CH, 720p 30fps/CH, SD 30fps/CH (Sub Stream) 720p or higher : 640x360 30fps/CH, SD : 30fps/CH * The maximum recording frame rate depends on the frame rate of the input camera.
	Recording Bandwidth	Maximum 70Mbps (Analog Camera only) ~ 51Mbps (Network Camera only)
	Resolution	8MP ~ CIF
	Mode	Manual, Schedule (Continuous/Event), Event(Pre/Post), Dual Track
	Event Trigger	Alarm Input Analog Camera : Video Loss, Motion Detection, Tampering Network Camera : Camera Event (Sensor, MD, Video analytics), VA event (Tampering, Enter / Exit, Passing, Virtual- line, (Dis)Appear, Face Detection, Audio detection), Defocus camera event
	Event Action	E-mail, PTZ preset, Alarm out, Buzzer, Monitor out

Search & Play	Playback Bandwidth	Maximum 32Mbps (18CH simultaneously)
	User	Maximum 4 users (Set 1, Remote 3)
	Simultaneous Playback	18CH(Local Monitor) 4CH (CMS, Wisenet Mobile), 1CH(Web)
	Fisheye Dewarping	WEB / CMS

Storage	Supported HDD	Up to 6TB
	HDD Slot	SATA 8ea(Maximum 48TB)

Backup	File Backup	BU, EXE(Include Player), AVI(Webviewer only)
	Function	Maximum 16 CH play, Date-time/title display






Functions

PTZ	Control	Via GUI, Webviewer, SSM, SmartViewer, Wisenet Mobile Viewer, System Controller
Smart Phone	Supported OS	iOS, Android

	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)
	Control	Live(16CH) : Multi-Profile Support Playback(4CH Multi Playback, Maximum 2MP) Event push
	Maximum Remote Users	Search(3), Live Unicast(10)
Redundancy	ARB	Support
Easy Configuration		Setup Wizard (Language Date/Time, Password, Network, Auto Camera Configuration), P2P (QR code)
Coaxial Control		CVBS(Pelco-C)/AHD/CVI/TVI
Interface		
	HDMI	1EA
	VGA	1EA
	BNC	16CH In / 1CH Out(Spot Output)
	Audio	Out(1EA, RCA, Line)
	Ethernet	RJ-45(10/100/1000BASE-T)
	Alarm	In 16EA, Out 4EA - Relay Out1(NO/NC/COM) - Relay Out2~4(NO/COM)
	USB	2EA(Front USB2.0, Rear USB 3.0))
	Serial(Protocols)	RS-485/422 (Samsung-T/Pelco-D/Pelco-p) *for PTZ
	Power Inlet	1EA AC
System		
	System Control	Mouse, IR Remocon, Webviewer, System Controller(SPC-7000, SPC-6000, SPC-2000)
	Language	English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai
Environmental		
	Operating Temperature	0°C to +40°C(+32°F to +104°F)
	Operating Humidity	20% ~ 85% RH
	Certification	UL, CE, FCC, KC
Electrical		
	Power Input	100~240 VAC±10%, 50/60 Hz
	Power Consumption	Maximum 180W (6T HDD 8ea)
Mechanical		
	Color / Material	Black / Metal
	Dimension (WxHxD)	440 x 88 x 384.8mm(17.32" x 3.46" x 15.15")
	Weight	Approximately 5.6Kg (12.4 lb, 4TB HDD 1ea)
Network		
	Protocol	TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), PPPoE, SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)
	DDNS	Wisenet DDNS

Transmission Speed	Analog Camera (Main Stream) 8MP 8fps/CH, 5MP 12fps/CH, 4MP 15fps/CH, 2MP 30fps/CH, 720p 30fps/CH, SD 30fps/CH (Sub Stream) 720p or higher : 640x360 30fps/CH, SD : 30fps/CH * The maximum recording frame rate depends on the frame rate of the input camera.	
Transmission Bandwidth	Maximum 30Mbps	
Audio	Input/Output	16 Line in (Built-in 4 inputs, Option : Audio Extension Cable) / 1 line out
	Compression	G.711 (N/W Cam G.711, 726)
	Audio Communication	2-Way
Maximum Remote Users	Search(3), Live Unicast(10), Multicast(20)	
Security	IP address filtering, User access log, 802.1x Authentication, Encryption (ID/PW, Recording, Transmission, Backup), Device Certificate(Hanwha Techwin Root CA)	
Viewer Software	Wisenet WAVE, SSM, Webviewer, SmartViewer, Wisenet Mobile Viewer Support SDK/CGI(SUNAPI) for integration to 3rd party VMS	

- The latest product information / specification can be found at hanwhasecurity.com
- Design and specifications are subject to change without notice.
- Wisenet is the proprietary brand of Hanwha Techwin, formerly known as Samsung Techwin.

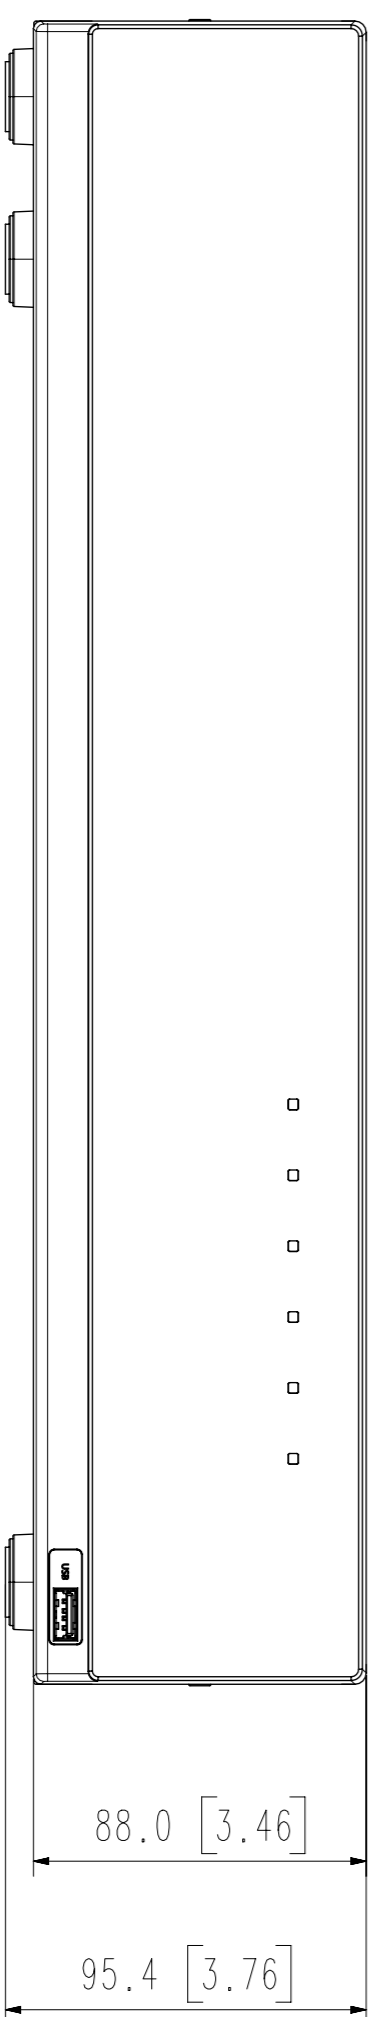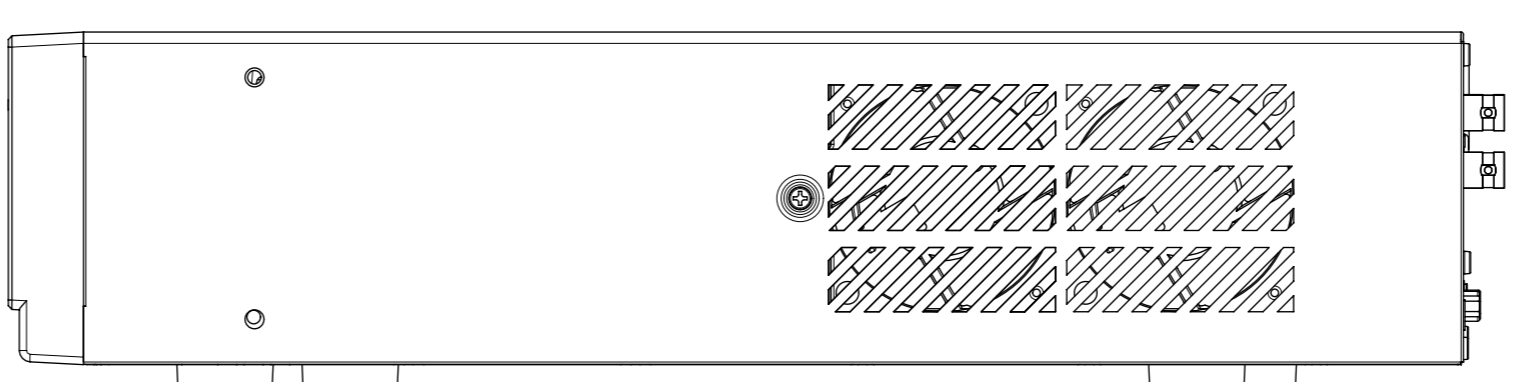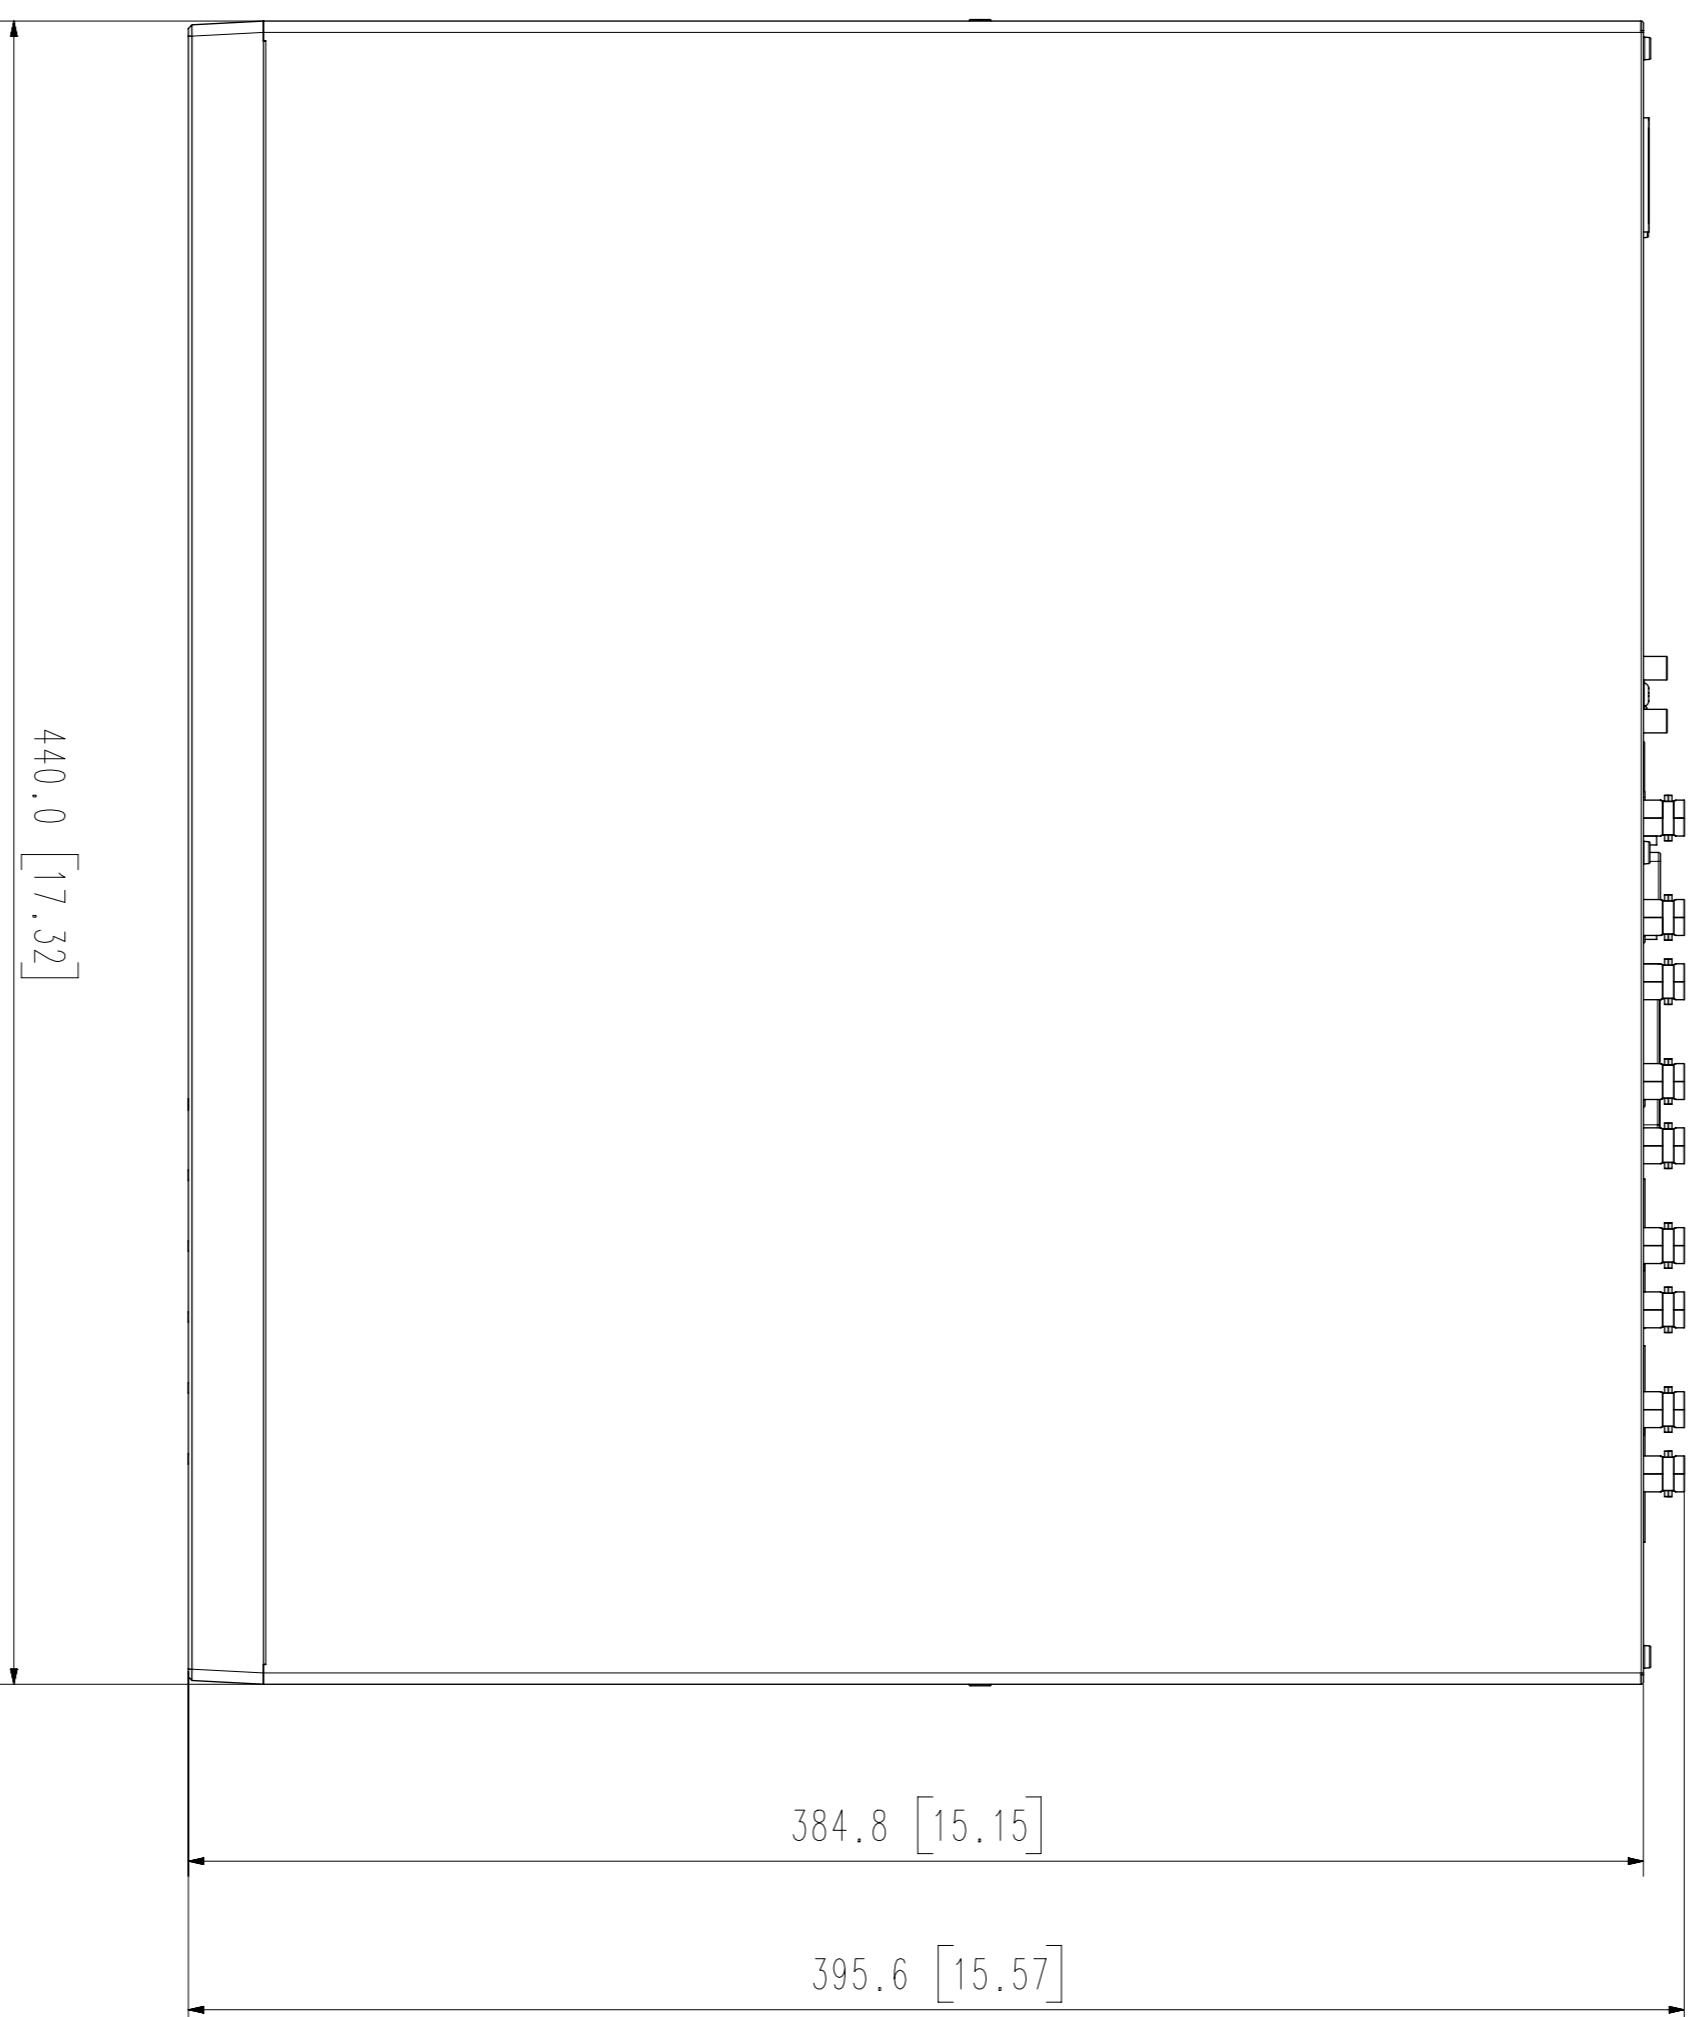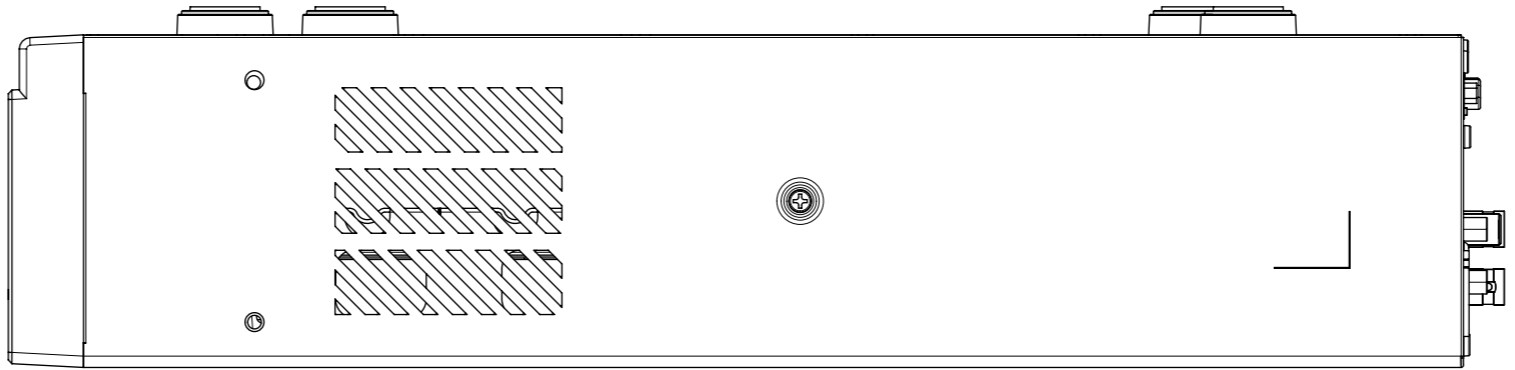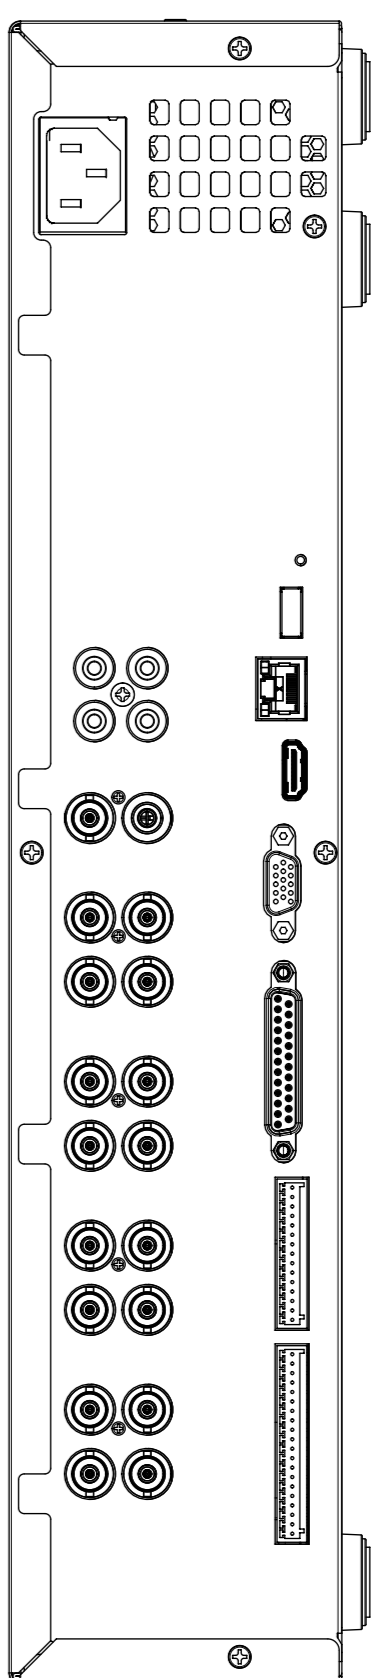

Appearance drawing HRX-1621
Unit : mm [inches]